



STL mini

13 W Surface Mounted Single Module
Linear LED Luminaire

Order Code : 3097701
Product Code : STL 014U 40OD00 1K2 60TK3I LN2XMN



Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 13.1 W
Final Luminous Flux	: 1364 lm
Efficacy	: 103.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

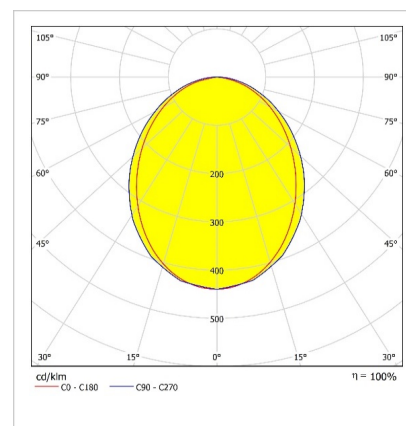


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: No
DALI Option	: Yes
Color Option	: RAL 9005

STL mini

13 W Surface Mounted Single Module Linear LED Luminaire

3097701 STL 014U 40OD00 1K2 60TK3I LN2XMN

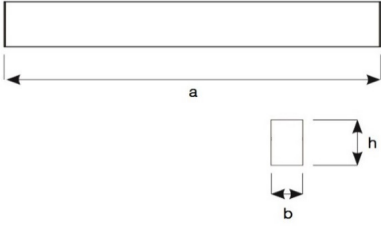

Dimensions (mm)


	a	b	h
Single Module	622	53	87
Starting Module	610	53	87
Finishing Module	610	53	87
Intermediate Module	602	53	87



Weight (kg)

Standard 2,3

Installation System

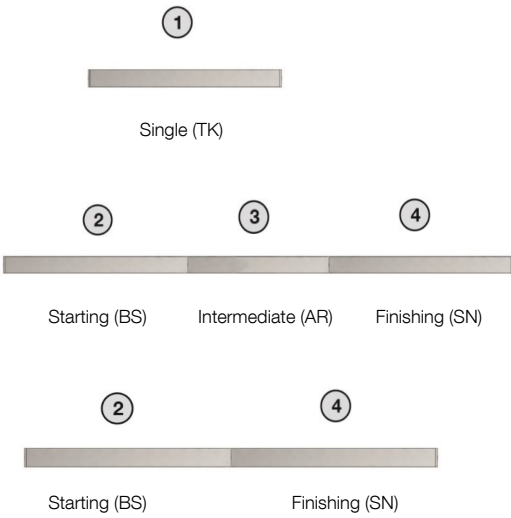

①
Ordering Code : 3097701
Product Code : STL 014U 40OD00 1K2
60TK3I LN2XMN
Module Model : Single (TK)

②
Ordering Code : 3097702
Product Code : STL 014U 40OD00 1K2
60BS3I LN2XMN
Module Model : Starting (BS)

③
Ordering Code : 3097700
Product Code : STL 014U 40OD00 1K2
60AR3I LN2XMN
Module Model : Intermediate (AR)

④
Ordering Code : 3097703
Product Code : STL 014U 40OD00 1K2
60SN3I LN2XMN
Module Model : Finishing (SN)

• EAE, reserves the right to make changes without prior notice.



Revision date: 09.02.2020