



STL mini

8 W Pendant Single Module
Linear LED Luminaire

Order Code : 3098271
Product Code : STL 008S 40OD00 0K7 60TK3I LN2XMN



Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 8.8 W
Final Luminous Flux	: 807.3 lm
Efficacy	: 90.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 200 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

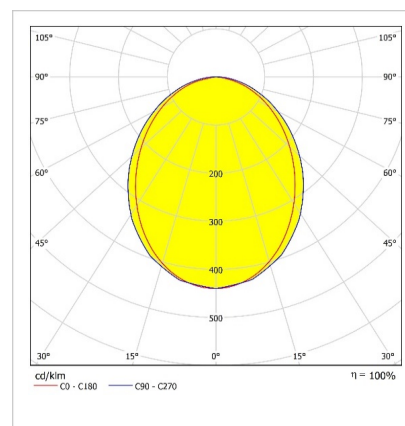


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: No
DALI Option	: Yes
Color Option	: RAL 9005

STL mini

8 W Pendant Single Module Linear LED Luminaire

3098271 STL 008S 40OD00 0K7 60TK3I LN2XMN

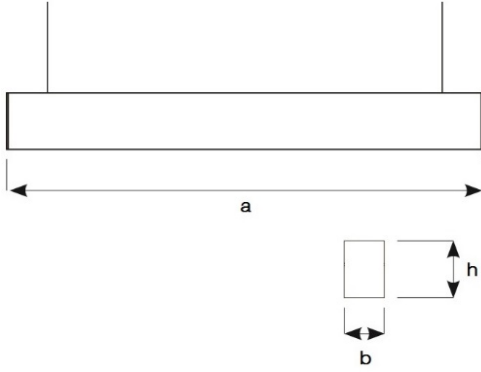

Dimensions (mm)


	a	b	h
Single Module	622	53	87
Starting Module	610	53	87
Finishing Module	610	53	87
Intermediate Module	602	53	87

Weight (kg)

Standard 2,3




Suspension Set



Dimensions (mm)

	a	b	h	\varnothing
Twin Mounting Set	1m - 2m - 3m	60	1,5	15

Installation System

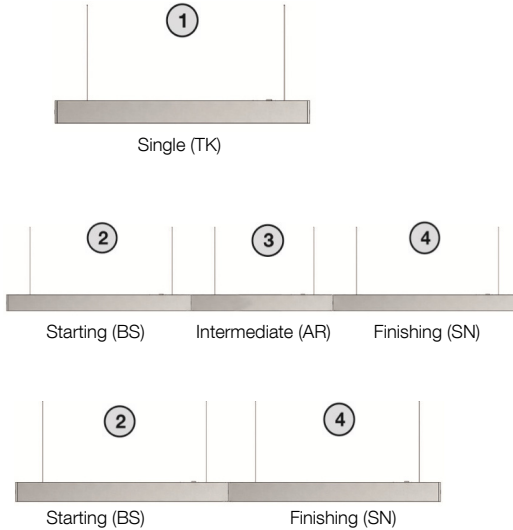

1

Ordering Code : 3098271
Product Code : STL 008S 40OD00 0K7
60TK3I LN2XMN
Module Model : Single (TK)

2

Ordering Code : 3098272
Product Code : STL 008S 40OD00 0K7
60BS3I LN2XMN
Module Model : Starting (BS)

3

Ordering Code : 3098270
Product Code : STL 008S 40OD00 0K7
60AR3I LN2XMN
Module Model : Intermediate (AR)

4

Ordering Code : 3098273
Product Code : STL 008S 40OD00 0K7
60SN3I LN2XMN
Module Model : Finishing (SN)

• EAE, reserves the right to make changes without prior notice.



Revision date : 09.02.2020