



STL mini

24 W Pendant Single Module
Linear LED Luminaire

Order Code : 3098525
Product Code : STL 024S 40OD00 2K1 90TK3I LN3XMN



Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 24.1 W
Final Luminous Flux	: 2435.9 lm
Efficacy	: 100.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 600 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is $\pm 10\%$ tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

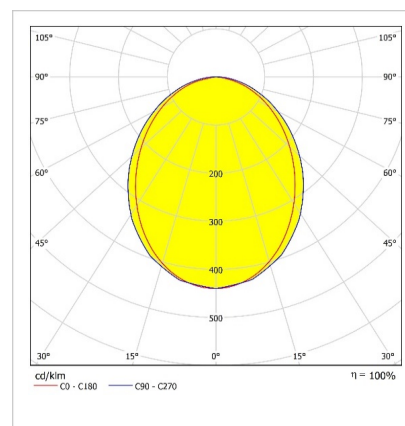


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: No
DALI Option	: Yes
Color Option	: RAL 9005

STL mini

24 W Pendant Single Module Linear LED Luminaire

3098525 STL 024S 40OD00 2K1 90TK3I LN3XMN

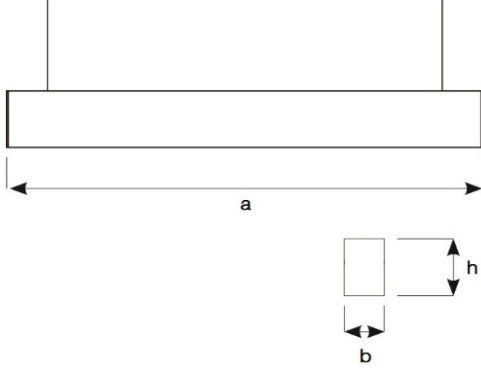

Dimensions (mm)


	a	b	h
Single Module	921,5	53	87
Starting Module	909	53	87
Finishing Module	909	53	87
Intermediate Module	901	53	87

Weight (kg)

Standard	3,1
----------	-----




Suspension Set



Dimensions (mm)

	a	b	h	Ø
Twin Mounting Set	1m - 2m - 3m	60	1,5	15

Installation System

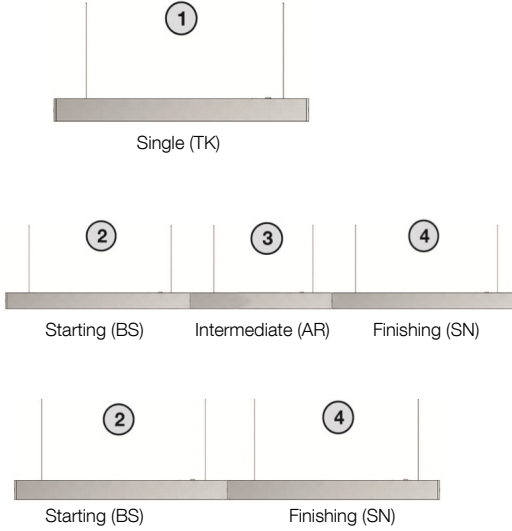

1

Ordering Code : 3098525
Product Code : STL 024S 40OD00 2K1
90TK3I LN3XMN
Module Model : Single (TK)

2

Ordering Code : 3098523
Product Code : STL 024S 40OD00 2K1
90BS3I LN3XMN
Module Model : Starting (BS)

3

Ordering Code : 3098522
Product Code : STL 024S 40OD00 2K1
90AR3I LN3XMN
Module Model : Intermediate (AR)

4

Ordering Code : 3098524
Product Code : STL 024S 40OD00 2K1
90SN3I LN3XMN
Module Model : Finishing (SN)

- EAE, reserves the right to make changes without prior notice.



Revision date : 09.02.2020