

STL mini

33 W Pendant Single Module
Linear LED Luminaire

Order Code : 3098549
Product Code : STL 032S 40OD00 2K8 120TK3I LN4XMN



Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 33.1 W
Final Luminous Flux	: 3247 lm
Efficacy	: 97.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 800 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is $\pm 10\%$ tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

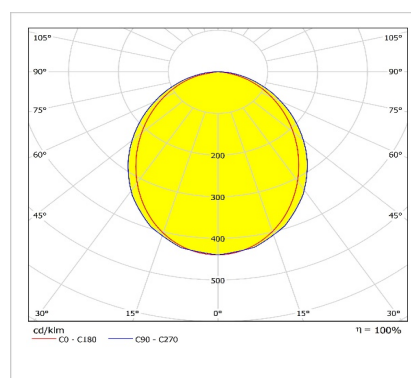


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005

STL mini

33 W Pendant Single Module Linear LED Luminaire

3098549 STL 032S 40OD00 2K8 120TK3I LN4XMN

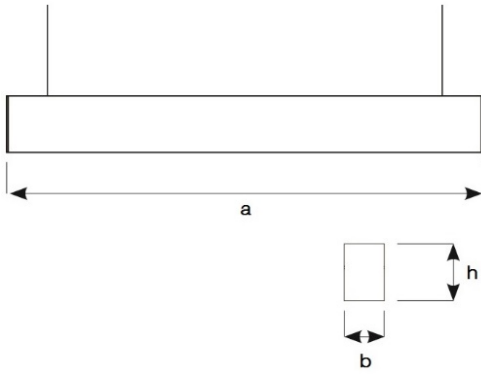


Dimensions (mm)

	a	b	h
Single Module	1221	53	87
Starting Module	1209	53	87
Finishing Module	1209	53	87
Intermediate Module	1201	53	87
Horizontal Rotation	630	53	87
Vertical Rotation	656	53	87

Weight (kg)

Standard	3,9
Horizontal-Vertical Rotation	3,6
With Emergency Kit (1 hr.)	4,3
With Emergency Kit (3 hrs.)	4,3

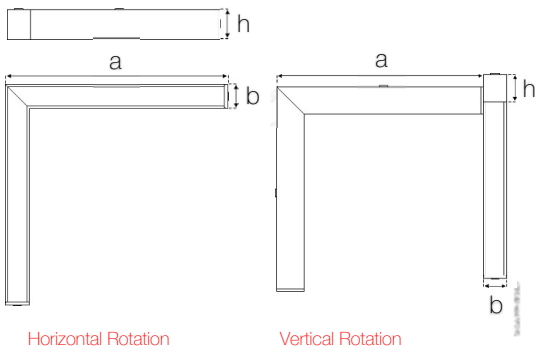


Horizontal Rotation

Vertical Rotation



Installation System

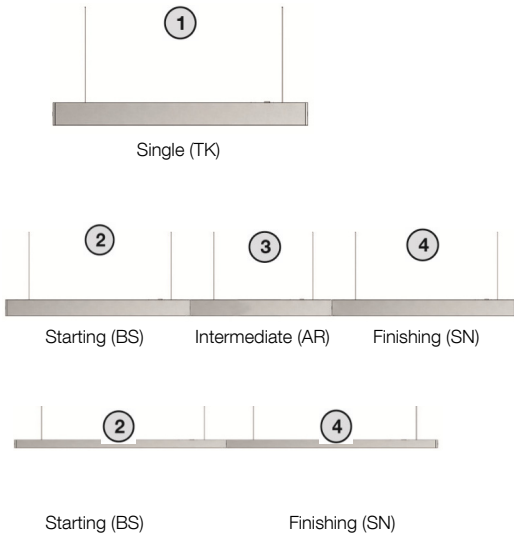


Single (TK)

Starting (BS) Intermediate (AR) Finishing (SN)

Starting (BS) Finishing (SN)

Suspension Set



Dimensions (mm)

	a	b	h	Ø
Twin Mounting Set	1m - 2m - 3m	60	1,5	15

1

Ordering Code : 3098549
Product Code : STL 032S 40OD00 2K8
120TK3I LN4XMN

Module Model : Single (TK)

3

Ordering Code : 3098546
Product Code : STL 032S 40OD00 2K8
120AR3I LN4XMN

Module Model : Intermediate (AR)

2

Ordering Code : 3098547
Product Code : STL 032S 40OD00 2K8
120BS3I LN4XMN

Module Model : Starting (BS)

4

Ordering Code : 3098548
Product Code : STL 032S 40OD00 2K8
120SN3I LN4XMN

Module Model : Finishing (SN)

- EAE, reserves the right to make changes without prior notice.



Revision date : 09.02.2020