



Order Code : 3103141
 Product Code : STL 007A 40OD28 0K3 029TK3I LN1XMC

STL MIKRO

7 W Recessed Mounted Single Module
 Linear LED Luminaire



Product Data

Standard Features


Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 7.7 W
Final Luminous Flux	: 390.3 lm
Efficacy	: 50.2 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Photometric Curve

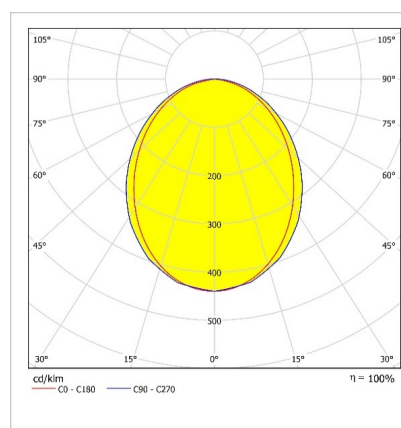

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005

STL MIKRO


7 W Recessed Mounted Single Module Linear LED Luminaire

3103141 STL 007A 40D28 0K3 029TK3I LN1XMC



Dimensions (mm)

	a	b	h1	h2	d ¹ , d ²
Single Module	313	54	60	40	292x45
Starting Module	293	54	60	40	284x45
Finishing Module	293	54	60	40	285x45
Intermediate Module	293	54	60	40	285x45



Weight (kg)

Standard	0,7
----------	-----

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
www.eaeaydinlatma.com.tr

Revision date: 10.02.2020