



Order Code : 3103177  
 Product Code : STL 021A 40OD28 1K5 117TK3I LN4XMC

## STL MIKRO

21 W Recessed Mounted Single Module  
 Linear LED Luminaire



### Product Data

#### Standard Features


Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

#### Optical & Electrical Features

Power Consumption	: 21 W
Final Luminous Flux	: 1588 lm
Efficacy	: 75,3 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

### Photometric Curve

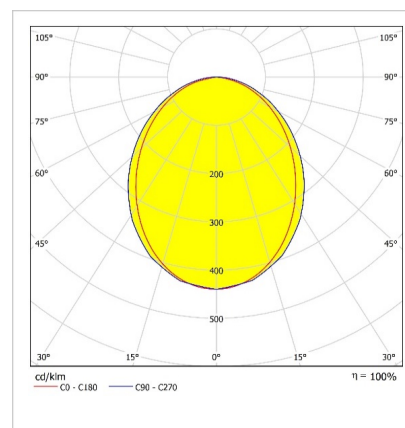

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

#### Optional Features


Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005

# STL MIKRO


21 W Recessed Mounted Single Module Linear LED Luminaire

3103177 STL 021A 40OD28 1K5 117TK3I LN4XMC

## Dimensions (mm)



	a	b	h1	h2	d <sup>1</sup> , d <sup>2</sup>
Single Module	1190	54	60	40	1181x45
Starting Module	1180	54	60	40	1173x45
Finishing Module	1180	54	60	40	1173x45
Intermediate Module	1170	54	60	40	1170x45



## Weight (kg)

Standard	2,6
----------	-----

- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 10.02.2020