

# STL MIKRO

7 W Surface Mounted Single Module  
Linear LED Luminaire

Order Code : 3103231  
Product Code : STL 007U 40OD28 0K3 029TK3I LN1XMC



## Product Data

### Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

### Optical & Electrical Features


Power Consumption	: 7.7 W
Final Luminous Flux	: 390.3 lm
Efficacy	: 50.2 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

### Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

## Photometric Curve

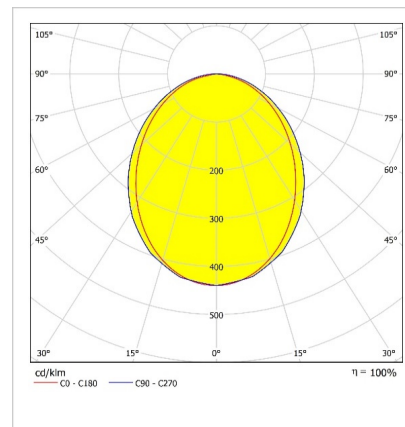

### Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005



# STL MIKRO

7 W Surface Mounted Single Module Linear LED Luminaire

3103231 STL 007U 40OD28 0K3 029TK3I LN1XMC

## Dimensions (mm)

	a	b	h
Single Module	300	40	40
Starting Module	293	40	40
Finishing Module	293	40	40
Intermediate Module	293	40	40



## Weight (kg)

Standard	1,6
----------	-----

- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 10.02.2020