



Order Code : 3103345
 Product Code : STL 027A 40OD28 2K0 087TK3I LN3XMC

STL MIKRO

27 W Recessed Mounted Single Module
 Linear LED Luminaire



Product Data

Standard Features


Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 27 W
Final Luminous Flux	: 2095.9 lm
Efficacy	: 77.4 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Photometric Curve

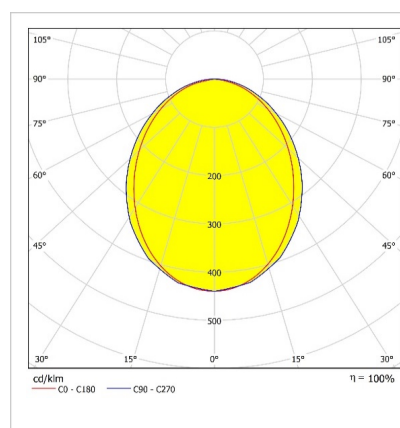

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005



STL MIKRO

27 W Recessed Mounted Single Module Linear LED Luminaire

3103345 STL 027A 40OD28 2K0 087TK3I LN3XMC

Dimensions (mm)

	a	b	h1	h2	d ¹ , d ²
Single Module	897.5	54	60	40	888x45
Starting Module	887.5	54	60	40	880x45
Finishing Module	887.5	54	60	40	880x45
Intermediate Module	877.5	54	60	40	877.5x45



Weight (kg)

Standard	2,3
----------	-----

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 10.02.2020