



Order Code : 3103357
 Product Code : STL 035A 40OD28 2K8 117TK3I LN4XMC

Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 34.9 W
Final Luminous Flux	: 2806.9 lm
Efficacy	: 80.3 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Other Features & Conditions


Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

STL MIKRO

34 W Recessed Mounted Single Module
 Linear LED Luminaire



Photometric Curve

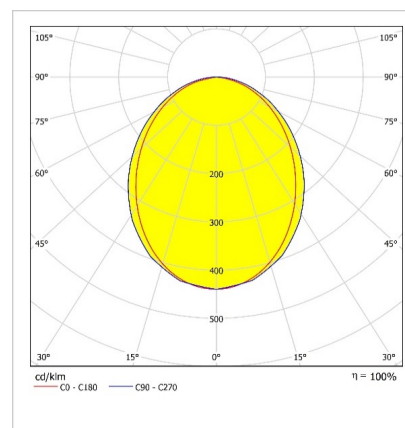


Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005

STL MIKRO


34 W Recessed Mounted Single Module Linear LED Luminaire

3103357 STL 035A 40OD28 2K8 117TK3I LN4XMC



Dimensions (mm)

	a	b	h1	h2	d ¹ , d ²
Single Module	1190	54	60	40	1181x45
Starting Module	1180	54	60	40	1173x45
Finishing Module	1180	54	60	40	1173x45
Intermediate Module	1170	54	60	40	1170x45



Weight (kg)

Standard	2,6
----------	-----

- EAE, reserves the right to make changes without prior notice.



Revision date: 10.02.2020