



Order Code : 3103369
 Product Code : STL 043A 40OD28 3K5 146TK3I LN5XMC

STL MIKRO

43 W Recessed Mounted Single Module
 Linear LED Luminaire



Product Data

Standard Features


Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features

Power Consumption	: 43.1 W
Final Luminous Flux	: 3570.1 lm
Efficacy	: 82.6 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±10 tolerance in the technical values.

Photometric Curve

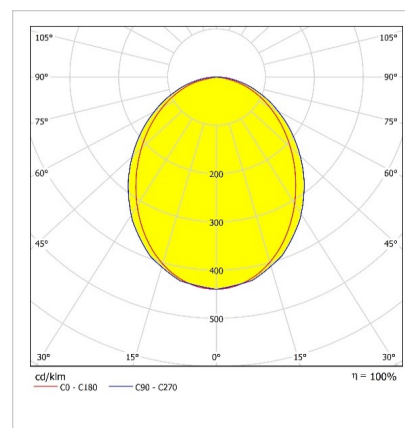

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005



STL MIKRO

43 W Recessed Mounted Single Module Linear LED Luminaire

3103369 STL 043A 40OD28 3K5 146TK3I LN5XMC

Dimensions (mm)

	a	b	h1	h2	d ¹ , d ²
Single Module	1482.5	54	60	40	1473x45
Starting Module	1472.5	54	60	40	1465.5x45
Finishing Module	1472.5	54	60	40	1465.5x45
Intermediate Module	1462.5	54	60	40	1462.5x45



Weight (kg)

Standard	3
----------	---

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
www.eaeaydinlatma.com.tr

Revision date: 10.02.2020