

STL MIKRO

27 W Surface Mounted Single Module
Linear LED Luminaire

Order Code : 3103435
Product Code : STL 027U 40OD28 2K0 087TK3I LN3XMC



Product Data

Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP40
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 27 W
Final Luminous Flux	: 2095.9 lm
Efficacy	: 77.4 lm/W
Input Voltage	: 220-240 24V DC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

*There is ±%10 tolerance in the technical values.

Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

Photometric Curve

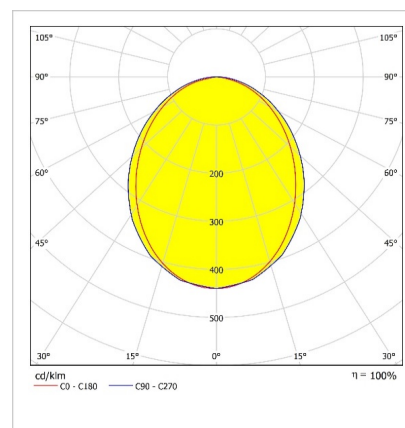

Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Color Option	: RAL 9005



STL MIKRO

27 W Surface Mounted Single Module Linear LED Luminaire

3103435 STL 027U 40OD28 2K0 087TK3I LN3XMC

Dimensions (mm)

	a	b	h
Single Module	883,5	40	40
Starting Module	880,5	40	40
Finishing Module	880,5	40	40
Intermediate Module	877,5	40	40



Weight (kg)

Standard	2,3
----------	-----

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

www.eaeaydinlatma.com.tr

Revision date: 10.02.2020