



## ORI-K MINI

Recessed Mounted 8 W Spot LED Luminaire

Order Code : 3201900  
Product Code : ORI 008A 40SD00 24 695 20 MN KR FLP



### Product Data

#### Standard Features


Housing	: Aluminium housing
Diffuser	: Transparent diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: COB LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 8 W
Final Luminous Flux	: 866,8 lm
Efficacy	: 103.18 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

### Photometric Curve

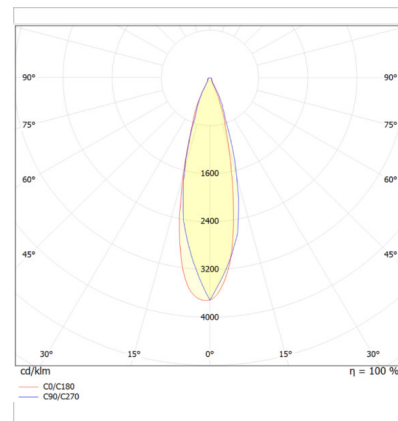

#### Other Features & Conditions

Operating Temperature Range	: -5 °C/+45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 45 °C


#### Optional Features

Correlated Color Temperatures	: 2700K / 3000K / 4000K / 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Degree Option	: 24° - 36°

## OR-K MINI


Recessed Mounted 8 W Spot LED Luminaire

3201900 ORI 008A 40SD00 24 695 20 MN KR FLP

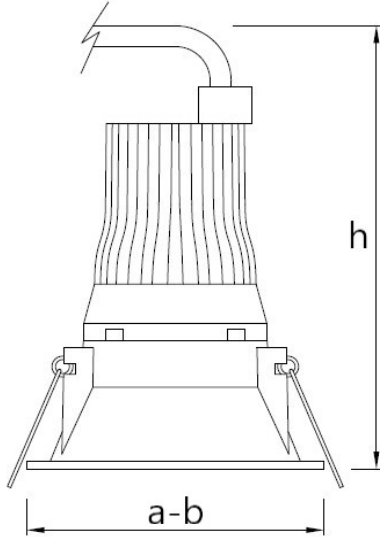

Dimensions (mm)

	a	b	h	d <sup>1</sup> ,d <sup>2</sup>
Standart	85	85	115	75x75



- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90

[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 08.10.2020