



BACKLIGHT SLIM

Recessed Mounted 60x60cm 35W LED Luminaire



Ordering Code : 3202419
 Product Code : BSL 035T 40OD00 3K5606020

Product Data

Standard Features

Housing	: 0,50mm Recessed mounted RAL9003 : Powder finished sheet steel
Diffuser	: Opal PMMA
Ceiling Type	: Rock-wool
IP Grade	: IP 20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 34.8W
Final Luminous Flux	: 3473.9 lm
Efficacy	: 99.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Drive Current	: 700mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Ambient Temperature Range	: -20C°/+40 C°
Ambient Temperature Range With Emergency Kit	: +5C°/+35 C°
Impact Resistance	: IK 02
Led Life Time	: 50.000 hours @ Ta=25 C°

Photometric Curve

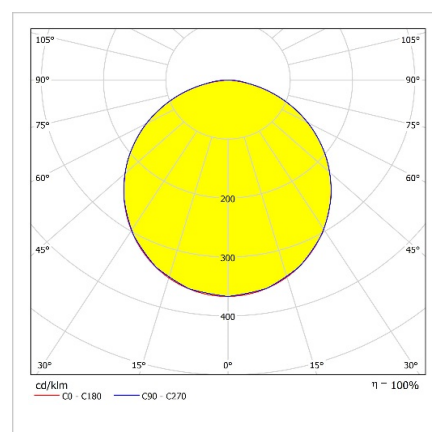

Optional Features


Ceiling Types	: Plasterboard, Clip-in, Lay-in, Surface-mounted
Correlated Color Temperatures	: 3000K - 6500K
Emergency Kit Options	: 1-3 hours
DALI Option	: Available
KAM Option	: Available
Color Option	: RAL 9005 - 9010

BACKLIGHT SLIM

Recessed Mounted 60x60cm 35W LED Luminaire

3202419 BSL 035T 40OD00 3K5606020


Technical Drawing

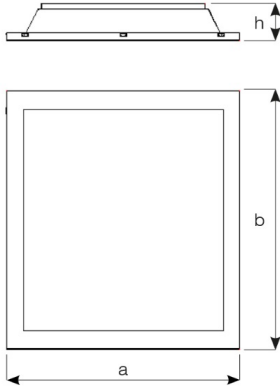

Recessed mounted

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	595	595	35	N/A
Plasterboard	595	595	35	585x585
Clip-in	600	600	35	N/A



Certificates



Weight (kg)

Standard	2,2
----------	-----

- EAE Aydınlatma reserves the right to make any change within this catalogue without prior notice.

engineering the light

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 08.12.2015