



## DOWNLED PC V.2

Surface Mounted 18 W Spot Led  
Lighting Luminaire

Order Code : 3233927  
Product Code : DWL 018U 40OD00 1K5 65 V.2 FLP



### Product Data

#### Standard Features

Housing	: Aluminium housing
Diffuser	: Recessed opal diffuser
IP Grade	: IP65
Installation	: Surface mounted
Light Source	: Mid Power LED
Electronic Control	: On-Off


#### Optical & Electrical Features

Power Consumption	: 17.2 W
Final Luminous Flux	: 1459.5 lm
Efficacy	: 84.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -20 C°/+40 C°
Impact Resistance	: IK02
LED Life Time - L70	: > 72.000 hours @Ta= 40 °C

### Photometric Curve

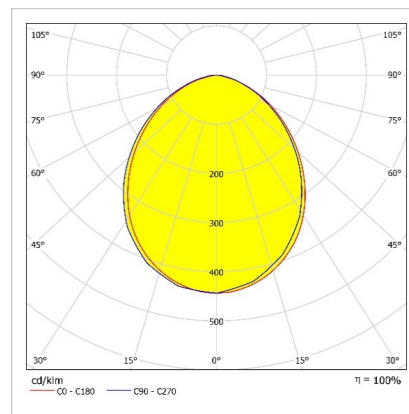



#### Optional Features

Correlated Color Temperatures	: 2700K,3000K,6500K
Emergency Kit Options	: No
DALI Option	: Yes

## DOWNLED PC V.2

Surface Mounted 18 W Spot Led Lighting Luminaire

3233927 DWL 018U 40OD00 1K5 65 V.2 FLP



### Dimensions (mm)

	Ø	h
Surface mounted	187	185

### Weight (kg)

Standard	0,7
----------	-----

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 24.03.2021