



GIZA V.2

Surface Mounted 8 W Spot LED Luminaire

Order Code : 3241985
Product Code : GZA 008U 40LN00 50 760 20 FLP



Product Data

Standard Features


Housing	: Aluminium housing
Diffuser	: 50° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Surface Mounted
Light Source	: SMD LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 8 W
Final Luminous Flux	: 894.11 lm
Efficacy	: 108.35 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is \pm 10% Tolerance in Technical Values.

Photometric Curve

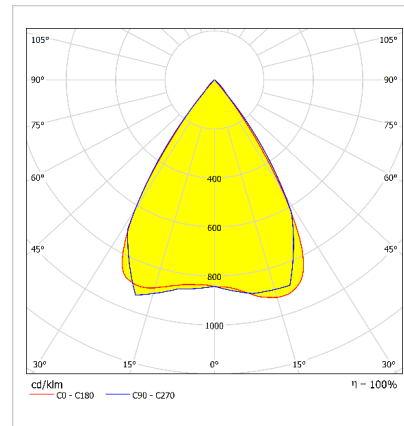

Other Features & Conditions

Operating Temperature Range	: -5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 saat @Ta= 35 °C


Optional Features

Correlated Color Temperatures	: 3000K / 4000K / 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Degree Option	: 50° / 80°

GIZA V.2

Recessed Mounted 8 W Spot LED Luminaire

3241985 GZA 008U 40LN00 50 760 20 FLP

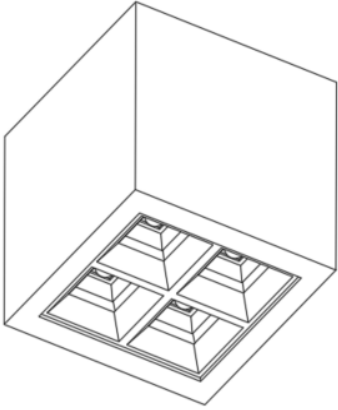

Dimensions (mm)

	a	b	h
Standard	105	105	100



- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.

İktisli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 08.10.2020