



GIZA V.2

Surface Mounted 15 W Spot LED Luminaire

Order Code : 3242033
Product Code : GZA 015U 40LN00 80 1K3 20 FLP



Product Data

Standard Features

Housing	: Aluminium housing
Diffuser	: 80° Lens + Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Surface Mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features


Power Consumption	: 14.2 W
Final Luminous Flux	: 1303.5 lm
Efficacy	: 91.76 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is \pm 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+45 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 50.000 hours @Ta= 45 °C

Photometric Curve

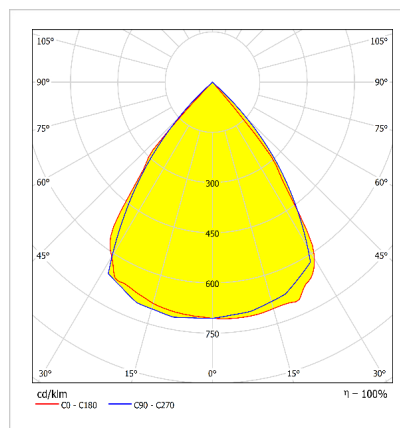


Optional Features

Correlated Color Temperatures	: 3000K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Degree Option	: 50°

GIZA V.2

Recessed Mounted 15 W Spot LED Luminaire

3242033 GZA 015U 40LN00 80 1K3 20 FLP

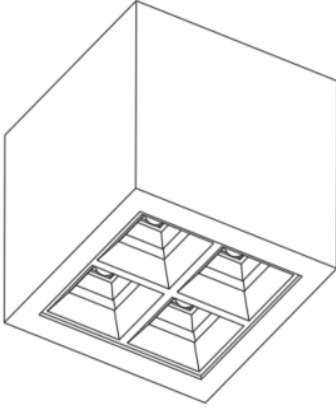


Dimensions (mm)

	a	b	h
Standard	105	105	100



- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) F
www.eaeaydinlatma.com.tr

Revision date: 08.10.2020