



CAPELLA V.2

15 W Paysage LED Lighting Luminaire

Order Code : 3249205
Product Code : CPL 015Z 40OD00 470 75X15 66 BL FLP



Product Data

Standard Features

Housing	: Aluminium housing
Diffuser	: Akrylic Diffuser
IP Grade	: IP66
Installation	: Floor mounted
Light Source	: Cob LED

Optical & Electrical Features


Power Consumption	: 15W
Final Luminous Flux	: 470 lm
Efficacy	: 32,02 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is \pm 10% Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C / +45 °C
Impact Resistance	: IK03
LED Life Time - L70	: > 60.000 hours @Ta= 45 °C

Photometric Curve

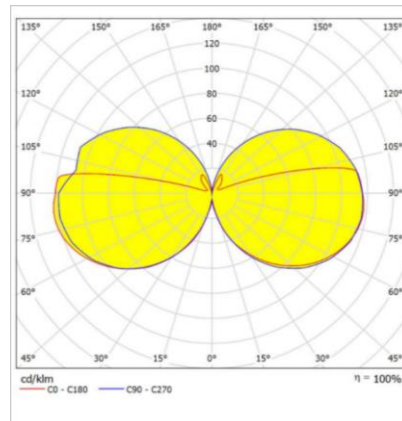

Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


CAPELLA V.2

15 W Paysage LED Lighting Luminaire

3249205 CPL 015Z 40OD00 470 75X15 66 BL FLP

Dimensions (mm)

	Ø	h
Standart	150	750

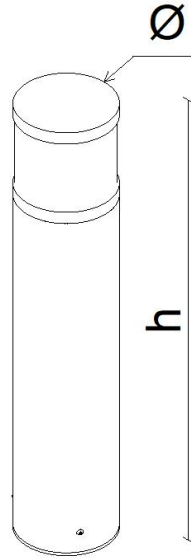

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 649 37 90
www.eaeaydinlatma.com.tr

Revision date: 11.10.2022