



DOWNLED v.2

Recessed Mounted 15 W Spot Led
Lighting Luminaire

Order Code : 3254722
Product Code : DWL 015A 40PC00 1K7 06 20 V.2 FLP



Product Data

Standard Features

Housing	: Aluminum housing
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 15 W
Final Luminous Flux	: 1710 lm
Efficacy	: 114 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -5 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: 72.000 saat @Ta= 35 °C

Photometric Curve

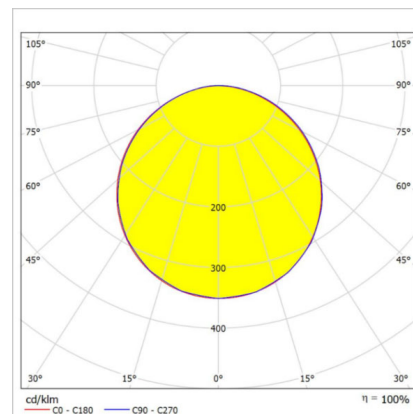



Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

DOWNLED v.2


Recessed Mounted 15 W Spot Led Lighting Luminaire

3254722 DWL 015A 40PC00 1K7 06 20 V.2 FLP

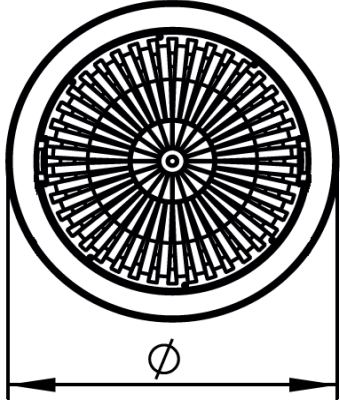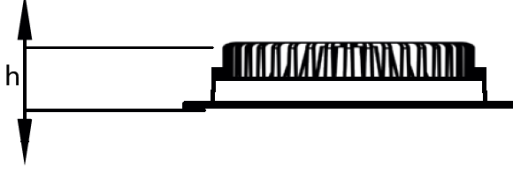

Dimensions (mm)

	Ø	h	Ø D
Recessed mounted	175	35	160



Weight (kg)

Standard	480
----------	-----

- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 14.04.2021

