



HBL IP65 LOWBAY

Surface Mounted 164 W LED High Bay Luminaire

Order Code : 3268174
 Product Code : HBL 162U 400A00 90 25K0 IP65



Product Data

Standard Features

Housing	: SW 306G painted aluminium injection housing
Optic	: Lens 90°
Diffuser	: PMMA/PC
IP Grade	: IP65
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 162 W
Final Luminous Flux	: 24957 lm
Efficacy	: 154 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photo-biologic Risk Group	: RG1

* There is ± 10% tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -30 °C/+50°C
Impact Resistance	: IK10
Led Life Time - L70	: > 72.000 hours @ Ta=50 °C

Photometric Curve

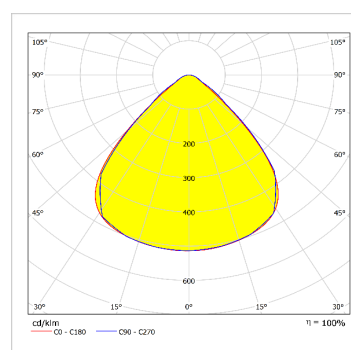



Optional Features

Correlated Color Temperatures	: 3000K, 5000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Optic Pain Option	: 55°

HBL IP65 LOWBAY

Surface Mounted 164 W LED High Bay Luminaire

3268174 HBL 162U 400A00 90 25K0 IP65

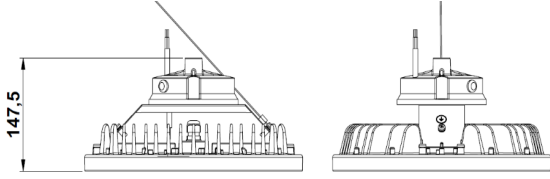

Dimensions (mm)


	a	b
Standard	314,9	147,5

Weight (kg)

Standard	3,5
----------	-----




Suspension Set

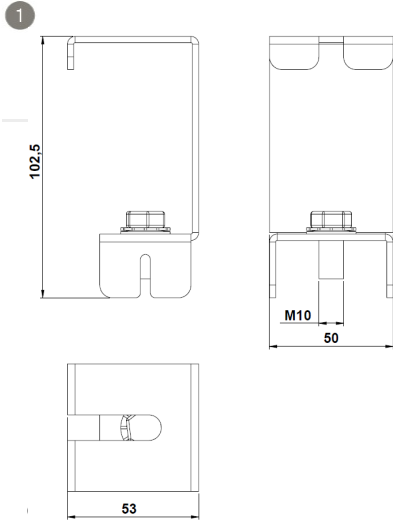


Order Code : 3269523

Product Code : HBL IP65 TRAY HANGER SET

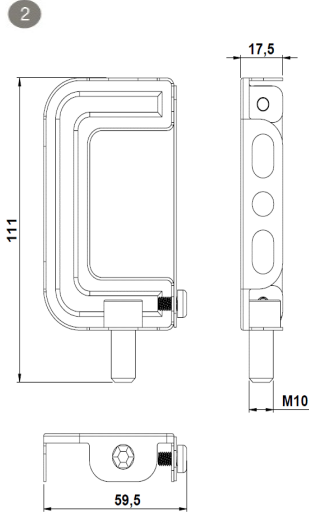

Order Code : 3269524

Product Code : HBL IP65 HANGER SET FOR BUSBAR SYSTEM

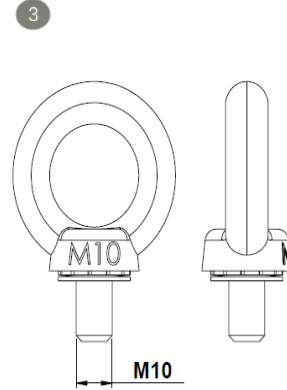

Pendant Single Hanger Set

Order Code : 3269522

Product Code : HBL IP65 PENDANT SINGLE HANGER KIT

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 19.09.2022