



HBL IP65 ARENA

Surface Mounted 162 W LED High Bay Luminaire

Order Code : 3268192
 Product Code : HBL 162U 400A00 55 24K3 IP65



Product Data

Standard Features

Housing	: SW 306G painted aluminium injection housing
Optic	: Lens 55°
Diffuser	: PMMA/PC
IP Grade	: IP65
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 162 W
Final Luminous Flux	: 24290lm
Efficacy	: 150 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photo-biologic Risk Group	: RG1

* There is ± 10% tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -30 °C/+50 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 72.000 hours @ Ta=50 °C

Photometric Curve

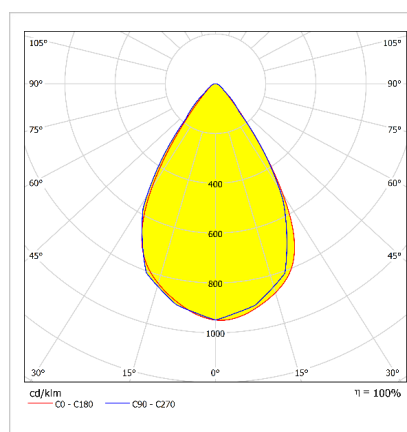


Optional Features

Correlated Color Temperatures	: 3000K, 5000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
Optic Pain Option	: 90°

HBL IP65 ARENA

Surface Mounted 162 W LED High Bay Luminaire

3268192 HBL 162U 400A00 55 24K3 IP65

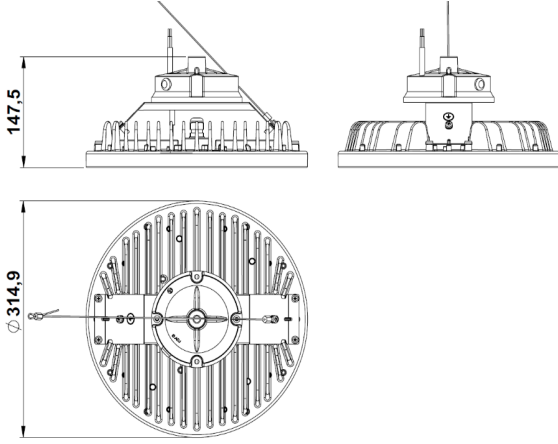

Dimensions (mm)


	a	b
Standard	314,9	147,5

Weight (kg)

Standard	3,5
----------	-----




Suspension Set

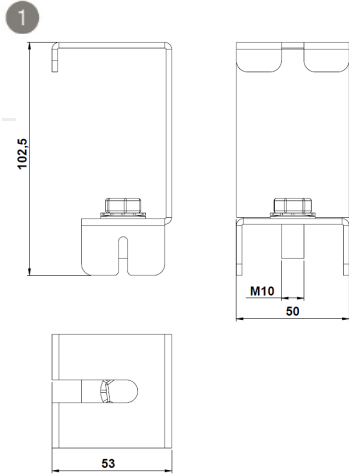

Cable Tray and Wall Hanger Set

Order Code : 3269523


Product Code : HBL IP65 TRAY HANGER SET

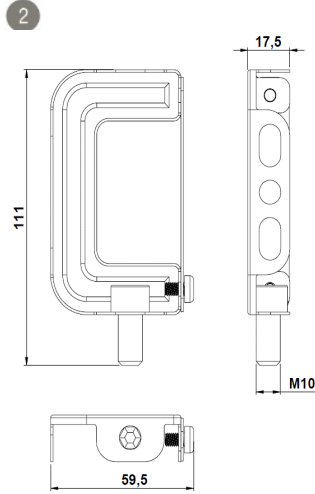

Busbar Hanger Set

Order Code : 3188241

Product Code : HBL IP65 HANGER SET FOR BUSBAR SYSTEM

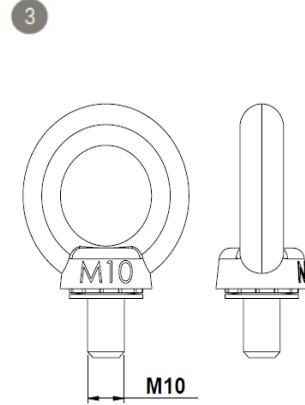

Pendant Single Hanger Set

Order Code : 3096325

Product Code : HBL IP65 PENDANT SINGLE HANGER KIT

- EAE, reserves the right to make changes without prior notice.



Revision date: 12.09.2022