



## STL mini

33 W Surface Mounted Single Module  
Linear LED Luminaire

Order Code : 3097739  
Product Code : STL 032U 40OD00 3K2 120TK3I LN4XMN



### Product Data

#### Standard Features

Housing	: RAL 7047 Powder finished aluminium extrusion housing, aluminium injection cover
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP40
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

#### Optical & Electrical Features


Power Consumption	: 33.1 W
Final Luminous Flux	: 3247 lm
Efficacy	: 97.8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 800 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\*There is ±%10 tolerance in the technical values.

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 72.000 hours @Ta= 40 °C

### Photometric Curve

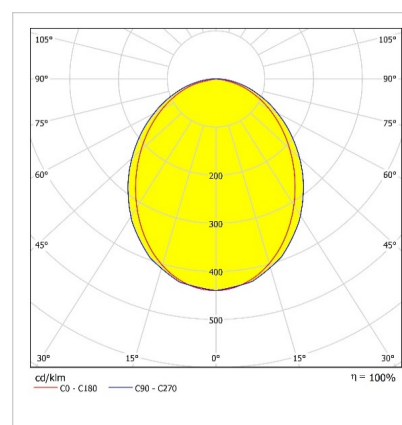


#### Optional Features

Correlated Color Temperatures	: 2700K, 3000K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005

# STL mini

33 W Surface Mounted Single Module Linear LED Luminaire

3097739 STL 032U 40OD00 3K2 120TK3I LN4XMN

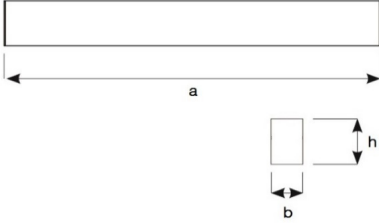


## Weight (kg)

Standard	3,9
Horizontal-Vertical Rotation	3,6
With Emergency Kit (1 hr.)	4,3
With Emergency Kit (3 hrs.)	4,3




## Installation System

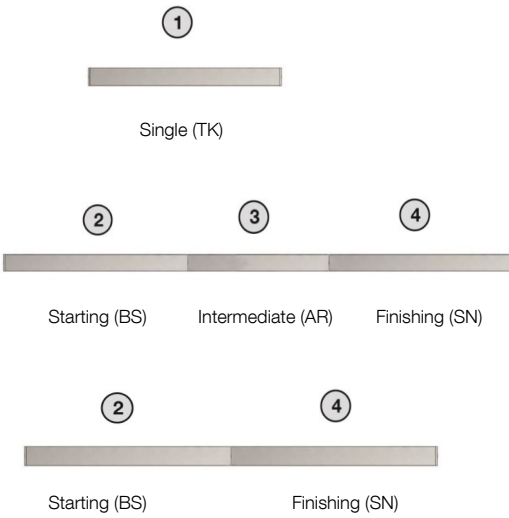


## Dimensions (mm)

	a	b	h
Single Module	1221	53	87
Starting Module	1209	53	87
Finishing Module	1209	53	87
Intermediate Module	1201	53	87
Horizontal Rotation	630	53	87
Vertical Rotation	656	53	87



Horizontal Rotation



Vertical Rotation

1

Ordering Code : 3097739  
Product Code : STL 032U 40OD00 2K8  
120TK3I LN4XMN  
Module Model : Single (TK)

2

Ordering Code : 3097737  
Product Code : STL 032U 40OD00 2K8  
120BS3I LN4XMN  
Module Model : Starting (BS)

3

Ordering Code : 3097736  
Product Code : STL 032U 40OD00 2K8  
120AR3I LN4XMN  
Module Model : Intermediate (AR)

4

Ordering Code : 3097738  
Product Code : STL 032U 40OD00 2K8  
120SN3I LN4XMN  
Module Model : Finishing (SN)

• EAE, reserves the right to make changes without prior notice.



Revision date: 30.01.2020